





Nurse Station - Scheme A: Saint Alphonsus light wood flooring shown in Corridor with Saint Alphonsus dark wood flooring in Nurse Station. Saint Alphonsus dark rubber base and solid surface counter tops. Saint Alphonsus accent color in alcoves. Stone removed from millwork, P-Lam installed.



Inpatient Semi-Private Room - Scheme A: Saint Alphonsus light wood flooring shown in Inpatient Semi-Private Room with Saint Alphonsus dark rubber base, solid surface sills and counter tops. Saint Alphonsus accent color in room.



MOB Lobby - Original Scheme

Saint Alphonsus Neighborhood Hospital - Nampa, Idaho

Not for regulatory approval,
bidding, or construction
By: Kevin TenBroek, AIA, LEED AP
Idaho Reg. No.: AR - 985956
Date: 11/16/16
Copyright © 2016 by PhiloWilke Partnership
All rights reserved.





MultiCare 

EMERGENCY

EMERGENCY



Consultants

Issues / Revisions

No.	Date	Description
1	05/19/2016	Issue for Permit and Construction
2	09/09/2016	PR-02
3	02/22/2017	CCD-07
4	3/15/2017	CCD-08

Project

Saint Alphonsus Neighborhood Hospital


1510 12th Ave Rd.
Nampa, Idaho 83686

Drawing Name

First Floor Reflected Ceiling Plan

Copyright (C) 2016 by PhiloWilke Partnership. All rights reserved.
This document and the information herein is the property of PhiloWilke Partnership. No part hereof shall be copied, duplicated, distributed, disclosed or used in any manner whatsoever except as expressly authorized by PhiloWilke Partnership. Any Person, firm, or corporation reviewing this document, however obtained, shall be deemed to have agreed to the foregoing restrictions and that this document will be held in trust and confidence subject only to the private use expressly authorized by PhiloWilke Partnership.

Print Date / Time: 3/16/2017 9:10:59 AM
P&W Commission Number: 215-193
Sheet Number: A-160

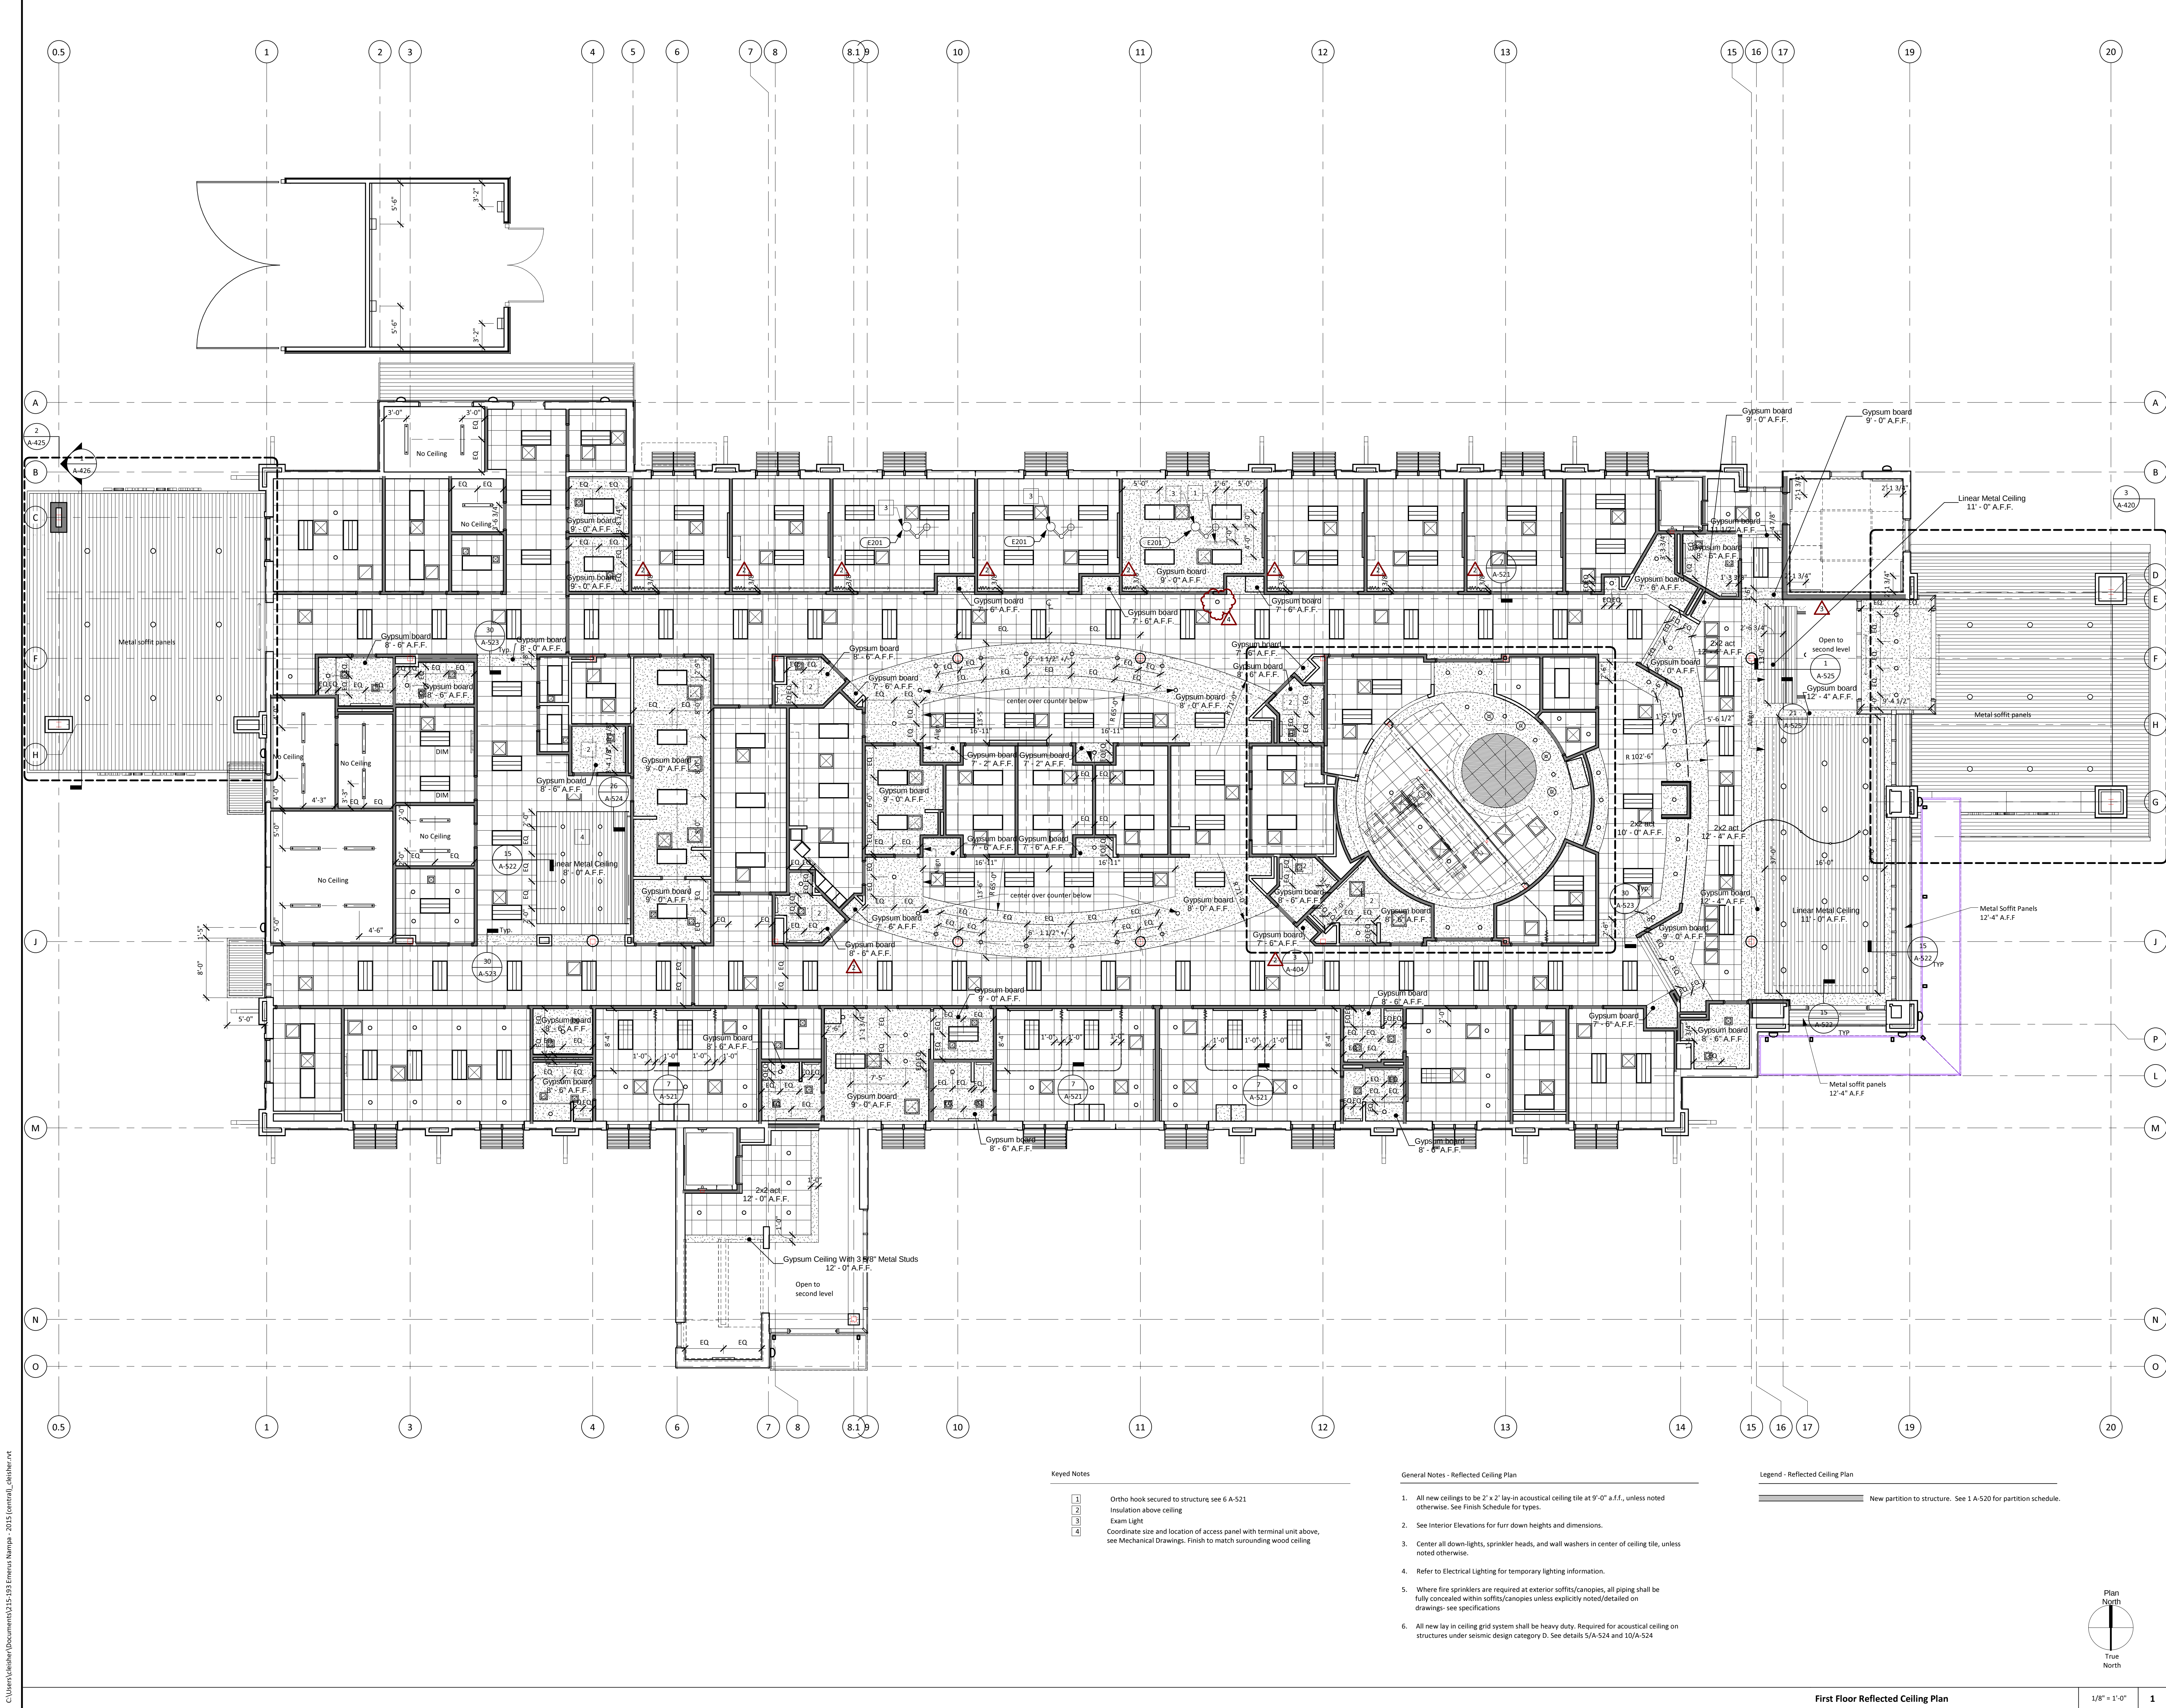

- Keyed Notes
- 1 Ortho hook secured to structure; see 6 A-521
 - 2 Insulation above ceiling
 - 3 Exam Light
 - 4 Coordinate size and location of access panel with terminal unit above; see Mechanical Drawings. Finish to match surrounding wood ceiling

- General Notes - Reflected Ceiling Plan
- 1. All new ceilings to be 2' x 2' lay-in acoustical ceiling tile at 9'-0" a.f.f., unless noted otherwise. See Finish Schedule for types.
 - 2. See Interior Elevations for furr down heights and dimensions.
 - 3. Center all down-lights, sprinkler heads, and wall washers in center of ceiling tile, unless noted otherwise.
 - 4. Refer to Electrical Lighting for temporary lighting information.
 - 5. Where fire sprinklers are required at exterior soffits/canopies, all piping shall be fully concealed within soffits/canopies unless explicitly noted/detailed on drawings: see specifications
 - 6. All new lay-in ceiling grid system shall be heavy duty. Required for acoustical ceiling on structures under seismic design category D. See details 5/A-524 and 10/A-524
- Legend - Reflected Ceiling Plan
- New partition to structure. See 1 A-520 for partition schedule.

